

UL Style No. 20811

RoHS



내열 전원 및 신호 케이블 PVC Jacketd Cable

제품의 용도

- 전자장비의 외부배선 또는 내부배선용

Application of Product

- External Interconnection of internal wiring of electronic equipment.


제품의 특성

- 정격 : 600V, 105°C
- 난연성 : VW-1, FT1 만족
- 적용규격 : UL Subject 758, UL 1581
- 제품인증 : Underwriters Laboratories Inc. (R)

Characteristics of Product

- Rating : 600V, 105°C
- Flammability : Complying VW-1, FT1
- Standard: UL Subject 758, UL 1581
- Certification : Underwriters Laboratories Inc.(R)

구조 및 구성 (Construction & Formation)

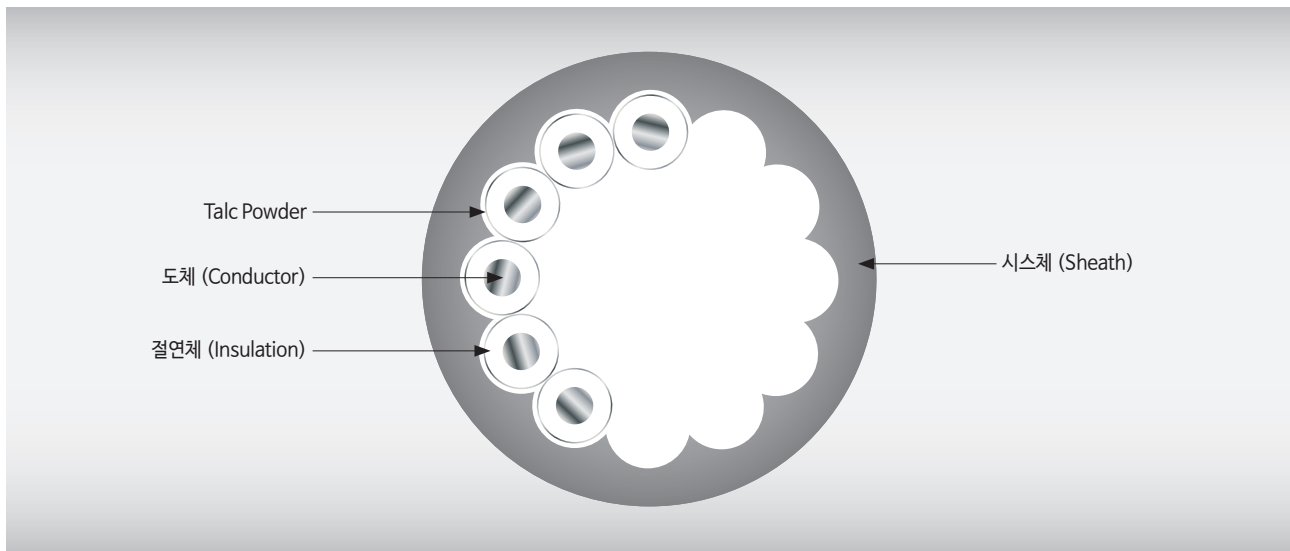

표면인쇄 (Surface Marking of Product)

E150633 AWM 20811 105°C 600V VW-1 8C x 18AWG KWANGIL RoHS

Item	Detail Contents		
Conductor	Certified AWG Range : 40AWG min. Workable AWG Range : 28AWG ~ 12AWG		
Insulation	Insulation Thickness : 15 Min. average in mils / 13 Min. at any point in mils		
Covering	(Optional) 6 Min. at any point in Mills		
Shield	(Optional) Spiral shield or Braid shield		
Sheath	Diameter of Cable under Jacket in inches	Average Thickness in Mils Minimum	Minimum Thickness at any point In Mils
	0.700 or less	30	24
	0.701~1.000	60	48
	1.001~1.500	80	64
# Major diameter if cable is flat or oval			