

# UL Style No. 2789

RoHS



## PVC자켓 케이블 (SB 타입) PVC Jacketed Cable (SB Type)

### 제품의 용도

- 전기, 전자기기의 신호 전송용

### Application of Product

- A signal transmission of electronic and electrical equipment


### 제품의 특성

- 정격 : 30V, 60°C
- 난연성 : VW-1 만족함
- 적용규격 : UL Subject 758, 1581
- 제품인증 : Underwriters Laboratories Inc. (R)

### Characteristics of Product

- Rating : 30V, 60°C
- Flammability : VW-1 Satisfaction
- Standard : UL Subject 758, 1581
- Certification : Underwriters Laboratories Inc.(R)

### 구조 및 구성 (Construction & Formation)

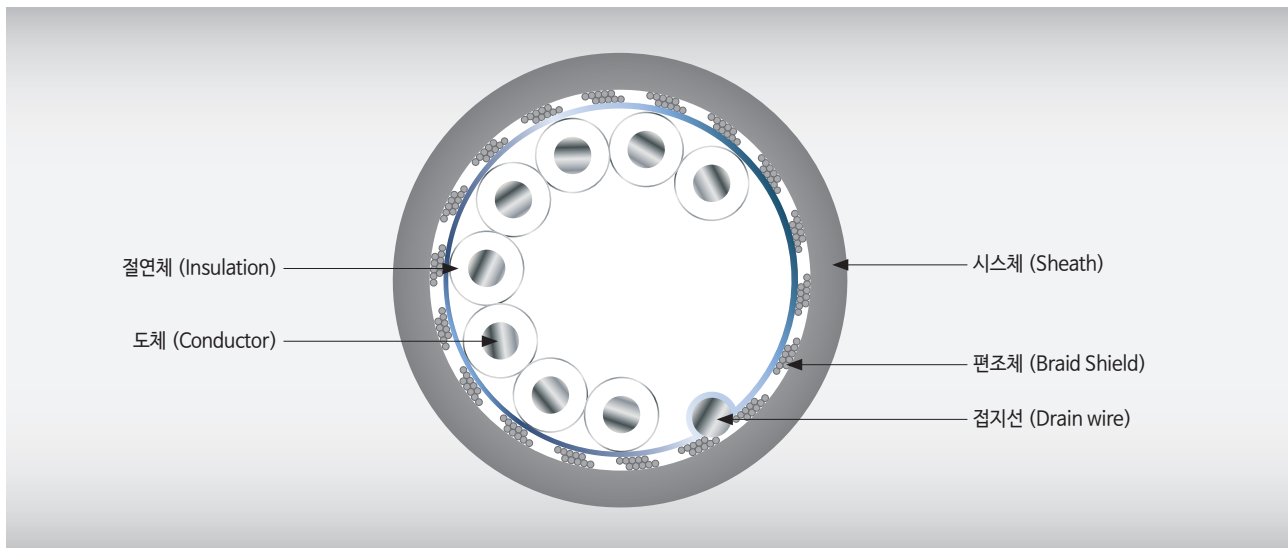

### 표면인쇄 (Surface Marking of Product)

E150633 AWM 2789 60°C 30V VW-1 10C x 28AWG KWANGIL RoHS

AWG Size	Conductor			Insulation			Tape Material	Braid Shield		Sheath	
	No. of core	Composition (No./mm)	Diameter (mm)	Material	Thickness (mm)	Diameter (mm)		Material	Coverage (%)	Thickness (mm)	Diameter (mm)
28	5	7/0.127	0.381	XL-PVC	0.15	0.68	AL Mylar		Min. 70	0.81	5.62
28	10	7/0.127	0.381	PE	0.1	0.58	AL Mylar	Tinned Annealed Copper (TA)	Min. 70	0.85	6.15
	11									1.04	7.23
	13									0.85	6.38
	25									0.85	7.95
	50								0.85	9.86	