

UL Style No. 2464

RoHS



기기 내 전원공급 및 신호전송 케이블 PVC Jacketed Cable (AME-S)


제품의 용도

- 전자장비의 내 · 외부 연결용
- 전자기간 전원 공급 및 신호전송용

제품의 특성

- Style No. Rating : 300V, 80°C
- 절연적용 Style No. : AWM Style No. 1061 or 1007
- 내전압 테스트 정격 : (AC) 2,000V
- 난연성 : VW-1, FT1, FT2 조건을 만족함
- 적용규격 : UL Subject 758, 1581
- 제품인증 : Underwriters Laboratories Inc. (R)
- 전기적 특성이 우수하며 유연성이 우수
- 외피색상 : 회색 or 흑색

구조 및 구성 (Construction & Formation)

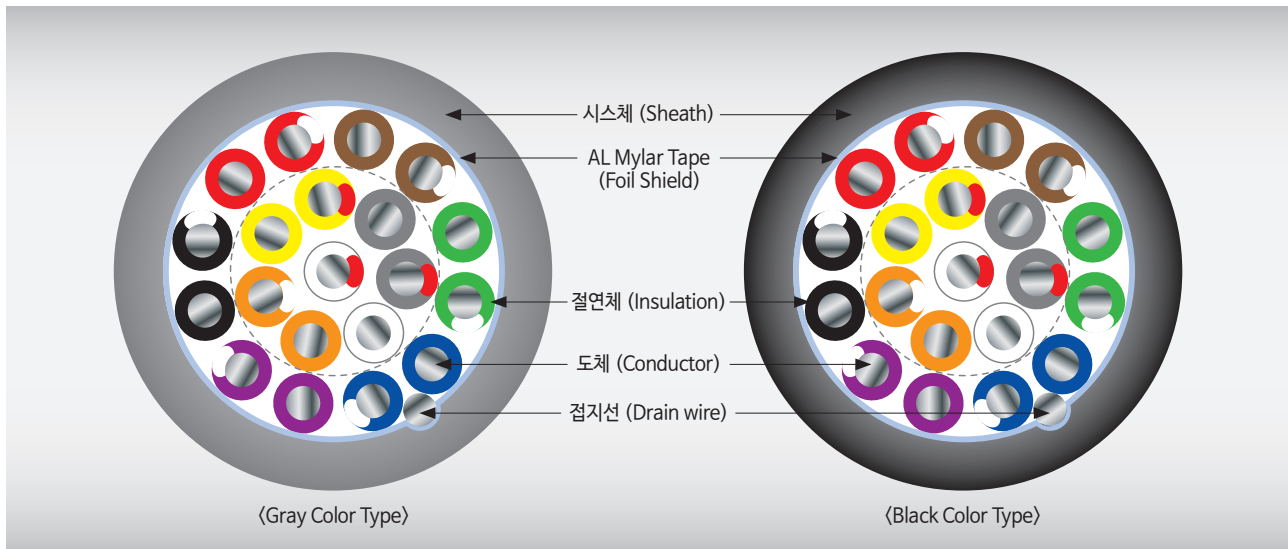

표면인쇄 (Surface Marking of Product)

E150633 AWM 2464 80°C 300V VW-1 AWM I/II A/B 80°C 300V FT1 KITRONIC-LiYY 8C x 24AWG KWANGIL RoHS

AWG Size	Conductor			Insulation		Tape Material	Drain Wire	Sheath	
	No. of Core	Material	Composition (No./mm)	Material	Diameter (mm)			Material	Diameter (mm)
28	2	Tinned Annealed Copper (TA)	7/0.127	Semi Rigid PVC	0.70	Aluminium Mylar	Tinned Annealed Copper (TA)	Class 43 PVC	3.00
	3								3.20
	4								3.30
	5								3.50
	6								3.70
	7								3.70
	8								4.00
	10								4.40
	12								4.60
	15								4.80
20	5.40								

UL Style No. 2464

RoHS

AWG Size	Conductor			Insulation		Tape Material	Drain Wire	Sheath									
	No. of Core	Material	Composition (No./mm)	Material	Diameter (mm)			Material	Diameter (mm)								
26	2	Tinned Annealed Copper (TA)	7/0.16	Semi Rigid PVC	0.95	Aluminium Mylar	Tinned Annealed Copper (TA)	Class 43 PVC	3.50								
	3								3.70								
	4								3.90								
	5								4.20								
	6								4.50								
	7								4.50								
	8								4.80								
	10								5.40								
	12								5.60								
	15								6.20								
	20								6.90								
24	2	Tinned Annealed Copper (TA)	11/0.16	Semi Rigid PVC	1.10	Aluminium Mylar	Tinned Annealed Copper (TA)	Class 43 PVC	3.80								
	3								4.00								
	4								4.30								
	5								4.60								
	6								5.00								
	7								5.00								
	8								5.40								
	10								6.20								
	12								6.40								
	15								7.00								
	20								7.70								
22	2	Tinned Annealed Copper (TA)	17/0.16	Semi Rigid PVC	1.25	Aluminium Mylar	Tinned Annealed Copper (TA)	Class 43 PVC	4.10								
	3								4.30								
	4								4.70								
	5								5.10								
	6								5.50								
	7								5.50								
	8								6.00								
	10								7.00								
	12								7.20								
	20								2	Tinned Annealed Copper (TA)	21/0.176	Semi Rigid PVC	1.45	Aluminium Mylar	Tinned Annealed Copper (TA)	Class 43 PVC	4.50
									3								4.80
4		5.20															
5		5.60															
6		6.20															
8		6.70															
10		7.80															
18	2	Tinned Annealed Copper (TA)	34/0.176	Semi Rigid PVC	1.90	Aluminium Mylar	Tinned Annealed Copper (TA)	Class 43 PVC	5.40								
	3								5.90								
	4								6.40								
16	2	Tinned Annealed Copper (TA)	54/0.176	Semi Rigid PVC	2.30	Aluminium Mylar	Tinned Annealed Copper (TA)	Class 43 PVC	6.20								
	3								6.60								
	4								7.60								