



## 다심 컴퓨터 케이블 Electronic Cable

### 제품의 용도

- 전기, 전자기기의 신호 전송용
- 컴퓨터와 전기장치의 연결용
- VTR, TV, 스테레오 수신기 등의 제어용
- VTR 카메라와 뷰파인더, 오디오, 비디오 장비의 연결용

### Application of Product

- Signal transmission of electrical and electronic equipment
- Interconnection of electronic equipment and computer.
- Control of VTR, TV, stereo receiver, etc.
- Connection of VTR Camera,, audio and video equipment.


### 제품의 특성

- 정격 : 30V, 80°C
- 난연성 : VW-1 만족함
- 적용규격 : UL Subject 758, 1581
- 제품인증 : Underwriters Laboratories Inc. (R)

### Characteristics of Product

- Rating : 30V, 80°C
- Flammability : VW-1 Satisfaction
- Standard : UL Subject 758, 1581
- Certification : Underwriters Laboratories Inc.(R)

### 구조 및 구성 (Construction & Formation)

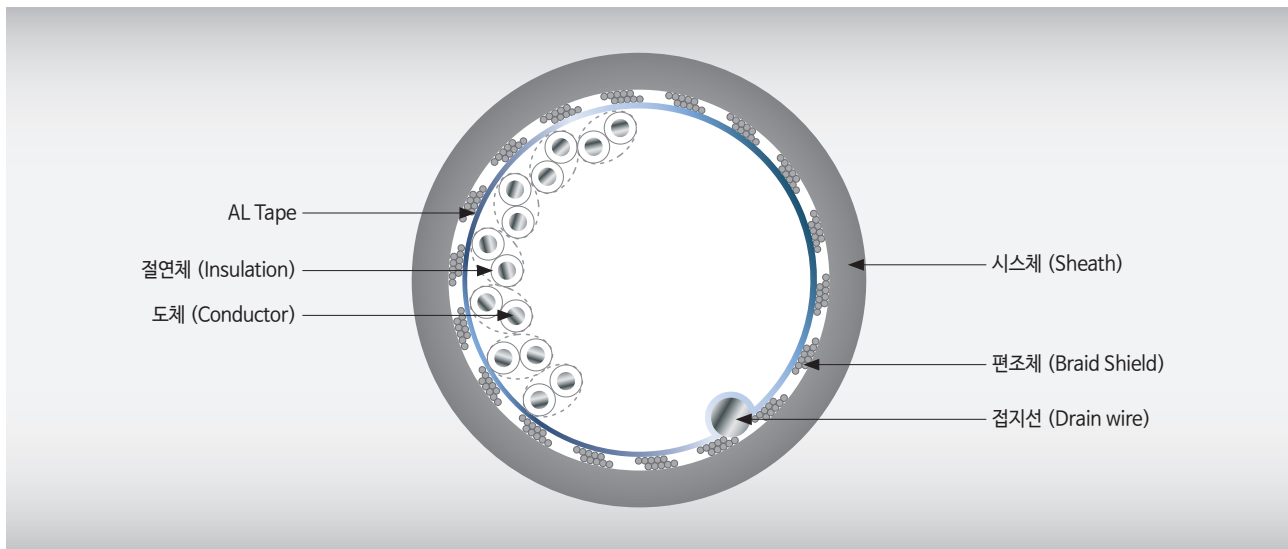

### 표면인쇄 (Surface Marking of Product)

E150633 AWM 2969 80°C 30V VW-1 25P x 26AWG KWANGIL RoHS

Conductor		Insulation		Tape Material	Braid Shield		Sheath		Max. Conductor Resistance at 20°C (Ω/km)	Min. Insulation Resistance at 15.6°C (MΩ · km)
AWG Size	No. of Pair	Material	Thickness (mm)		Material	Coverage (%)	Material	Thickness (mm)		
30 ~ 24	5	PVC	0.18 or 0.40	AL Mylar	Tinned Annealed Copper (TA)	Min. 70	PVC	1.00	5	500
	6									
	7									
	10									
	15									
	20									
	25									
30										