


UL Style No. 1726

RoHS

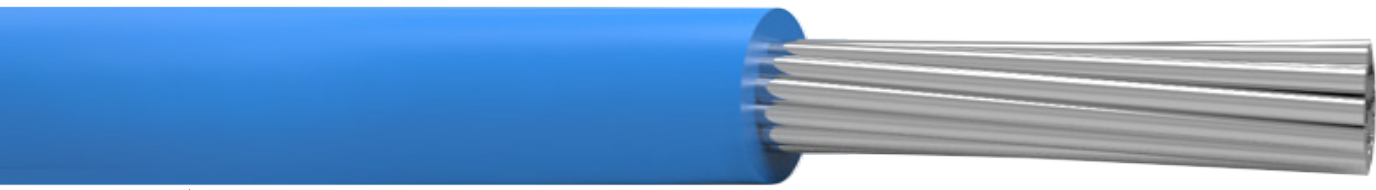

테프론(PFA) 절연 전선

Teflon(PFA) insulated wire

제품의 설명

- UL File No. E157965
- Standard : UL Subject 758
- Use : Internal wiring of Appliances
- Temperatures exceeding : 250°C

RATING

STYLE No	Volt.(max)	Tem p.(max)
1726	300V	250°C

도체				절연체		스파크 시험전압 (AC V)	표준조장 (m)
전선규격	단면적 (mm²)	구성 (EA / mm)	외경 (mm)	두께 (mm)	외경 ((mm)		
32	0.04	7 / 0.08	0.24	0.33	0.90	3,000 V	610
30	0.06	7 / 0.102	0.31	0.33	0.97		
28	0.09	7 / 0.127	0.39	0.33	1.05		
26	0.14	7 / 0.16	0.49	0.33	1.15		
24	0.20	7 / 0.203	0.62	0.33	1.28		
22	0.30	13 / 0.18	0.75	0.33	1.41		
20	0.50	21 / 0.18	0.95	0.33	1.61		
18	0.75	35 / 0.18	1.23	0.33	1.89		
16	1.25	55 / 0.18	1.54	0.33	2.20		
14	2.0	41 / 0.26	1.92	0.33	2.58		
12	3.5	44 / 0.32	2.70	0.33	3.36		
10	5.5	68 / 0.32	3.40	0.33	4.06		
8	8.5	103 / 0.32	4.20	0.51	5.22		
6	14	7 / 13 / 0.45	5.40	0.51	6.42		
4	22	7 / 20 / 0.45	6.70	0.76	8.22		
2	38	19 / 13 / 0.45	9.10	0.76	10.62		
1	50	19 / 17 / 0.45	10.50	1.14	12.78		