



비닐 절연 점퍼선

Insulated Jumper Wire


제품의 용도

- 전기, 전자기기의 신호전송용
- TW 전원 및 전동 시그닛 또는 온도 / 습도 체크기 전송용

Application of Product

- A signal transmission of electronic and electrical equipment.
- A transmission of TW source of electric power, electric motor, temperature · humidity check equipment.

구조 및 구성 (Construction & Formation)

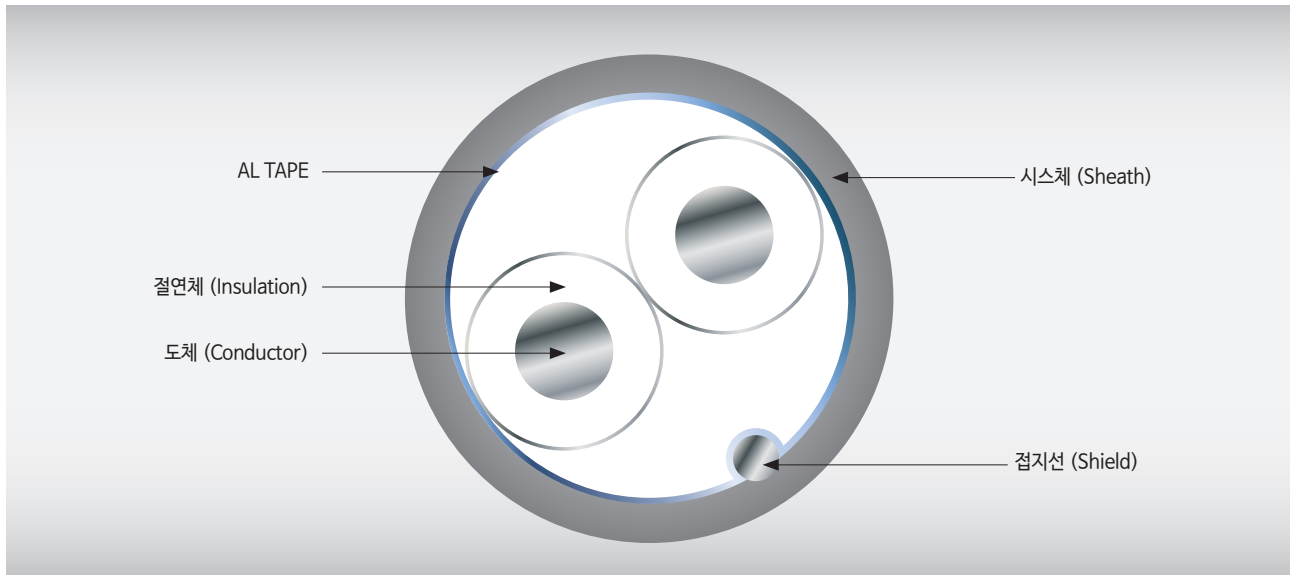

표면인쇄 (Surface Marking of Product)

Ⓜ MVV-S 0.9mm X 2C KWANGIL RoHS

No. of core	Composition (No./mm)	Insulation		Tape Material	Braid Shield		Sheath		Conductor Resistance at 20°C (Ω/km)
		Thickness (mm)	Diameter (mm)		Material	Coverage (%)	Thickness (mm)	Diameter (mm)	
2	1/0.9	0.45	1.70	AL Mylar	TA	Min. 70	1.10	5.6	28.23
3	1/0.9	0.45	1.70		TA	Min. 70	1.10	6.1	28.23