


UL Style No. 10491

RoHS

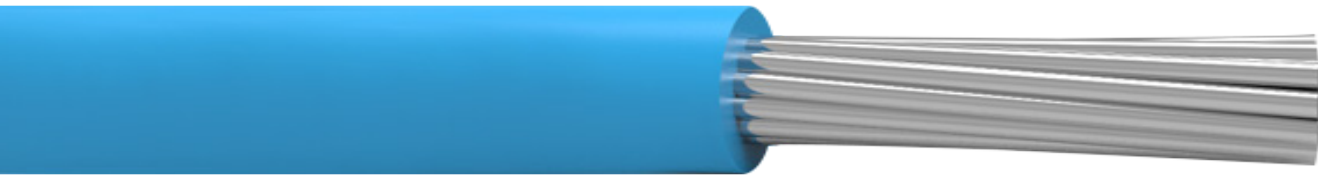

테프론(FEP) 절연 전선

Teflon(FEP) insulated wire

제품의 설명

- UL File No. E157965
- Standard : UL Subject 758
- Use : Internal wiring of Appliances
- Temperatures exceeding : 150°C

RATING

STYLE No	Volt.(max)	Tem p.(max)
10491	300V	150°C

도체				절연체		스파크 시험전압 (ACV)	표준조장 (m)
전선규격	단면적 (mm ²)	구성 (EA / mm)	외경 (mm)	두께 (mm)	외경 (mm)		
30#	0.06 SQ	7 / 0.102	0.31	0.13	0.57	3,000 V	610
28#	0.09 SQ	7 / 0.127	0.39	0.13	0.65		
26#	0.14 SQ	7 / 0.16	0.49	0.13	0.75		
24#	0.20 SQ	7 / 0.203	0.62	0.13	0.88		
22#	0.30 SQ	13 / 0.18	0.75	0.13	1.01		
20#	0.50 SQ	21 / 0.18	0.95	0.13	1.21		
18#	0.75 SQ	35 / 0.18	1.23	0.18	1.59		
16#	1.25 SQ	55 / 0.18	1.54	0.18	1.90		
14#	2.0 SQ	41 / 0.26	1.92	0.32	2.56		
12#	3.5 SQ	44 / 0.32	2.70	0.32	3.34		
10#	5.5 SQ	68 / 0.32	3.40	0.32	4.04		
8#	8.0 SQ	7 / 14 / 0.32	3.60	0.46	4.52		